

# **PROVEN PERFORMER**

## **Compact Commercial Laundry**

LTEE5A (stack washer/dryer - electric) LTGE5A (stack washer/dryer - gas)

### Stack washer/dryer features

- · Improved suspension with new out-of-balance logic manages and redistributes unbalanced loads for uninterrupted wash cycles
- Water use is trimmed to 45 litres per cycle to reduce operating costs
- Efficient dryer heating with 21 MJ (gas models) and up to 4,000 Watts (electric models)
- · Large, easy-to-clean lint compartment
- 1913.8 sq. cm door opening is the largest in the industry, providing easy loading and unloading
- High spin speed up to 1,200 rpm removes more water from clothes, speeding up drying cycles and lowering energy usage
- Moisture sensing system gives accurate temperature control, protecting garments and reducing energy consumption



I OW/WATER CONSUMPTION

LOW ENERGY CONSUMPTION

COMPACT DESIGN

Controls

#### Stack washer/dryer Electronic Control

The Electronic Control keeps users informed throughout the wash process with cycle status lights and a digital cycle countdown. Users also have the flexibility to control temperature, spin speeds, and soil levels, as well as the option of a pre-wash and/or additional rinse to achieve high levels of efficiency. Automatic (moisture sensing) cycles come standard.









LTEE5A, LTGE5A



#### SPEED QUEEN. WORLD NO.1 IN COMMERCIAL LAUNDRY




	LTEE5A (	Electric)	LTGE5A (Gas)					
Туре	Stack Washer	Stack Dryer	Stack Washer	Stack Dryer				
Control	Electronic	Electronic	Electronic	Electronic				
Control location	Front	Front	Front	Front				
Drum								
Capacity kg	10 kg	10 kg	10 kg	10 kg				
Cylinder volume litres	96.8 Lt	198 Lt	96.8 Lt	198 Lt				
Drum speed								
Spin speed G-Force	440	n/a	440	n/a				
Spin speed rpm	1200	n/a	1200	n/a				
Motor								
Motor size kW	Variable speed induction 0.67	0.25	Variable speed induction 0.67	0.25				
Cabinet								
Cylinder finish	Stainless steel	Stainless steel	Stainless steel	Stainless steel				
Colours	White	White	White	White				
Door type (solid/window)	Window	Window	Window	Window				
Heating								
Heat sources	n/a	Electric	n/a	Gas				
Heating element (Electric W)	n/a	4000	n/a	n/a				
Connection								
Gas inlet connection mm	n/a	n/a	n/a	9.5				
Gas consumption MJ/Hr	n/a	n/a	n/a	21.09 MJ				
Exhaust outlet dia. mm	n/a	102	n/a	102				
Exhaust airflow litres/sec	n/a	85	n/a	85				
Water temperatures	3	n/a	3	n/a				
Operation								
Cycles	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only	Dryer: Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only	Dryer: Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up				
Water consumption per cycle litres	44.3	n/a	44.3	n/a				
Water pressure kPa	140/830 kPa	n/a	140/830 kPa	n/a				
Cycle indicator lights	Digital display	Digital display	Digital display	Digital display				
Power								
Electrical requirements (voltage/Hz/Ph)	240/50/1, 6 amp	240/50/1, 20 amp	240/50/1, 6 amp	240/50/1 4 amp				
Transport data								
Net weight kg	177 (cor		177 (combined)					
Shipping weight kg	193 (cor		193 (combined)					
Dimensions H×W×D mm	1986×6		1986×683×704					
Packing dimensions H×W×D mm	2032×73	37×832	2032×737×832					
Agency approvals								
Available agency approvals	Electri	c SAA	Electric SAA, Gas AGA #4946					




#### Dimensions

#### Stack Washer/Dryer – electric

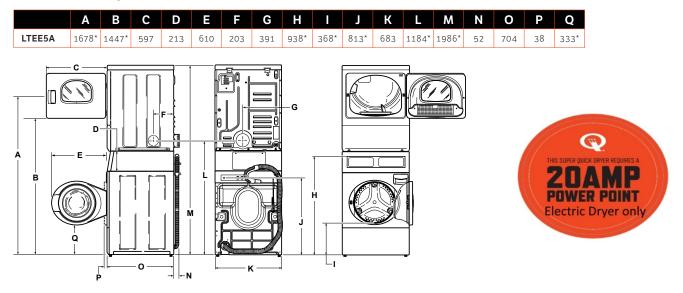

#### Stack Washer/Dryer – gas

	Α	В	С	D	Е	F	G	Н	I	J	К	L	М	Ν	0	Ρ	Q	R
LTGE5A	1678*	1447*	597	213	610	203	391	59	938*	368*	1140*	813*	683	1184*	1986*	52	704	38

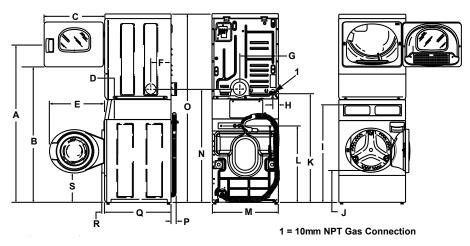

All measurements are in mm. \*With levelling legs turned into base. NOTE: Exhaust openings are 102 mm metal ducting.







Speed Queen Equipment Sales Pty. Ltd. 26 Theobald Street, Thornbury, Vic 3071 Ph: (03) 9495 1300 Fax: (03) 9495 1600 W: www.speedqueensales.com.au E: sales@speedqueensales.com.au Servicing Victoria, Tasmania, S.A. & N.T.