



PROVEN PERFORMER

Vended Tumble Dryers

SA025, SA030, SA035, SA055, SA075 (Gas heat standard)

Features

- Large door opening for easy loading and unloading
 - extra strong hinge and reversible door
- Galvanized drum - oval drum holes preventing damage from standard drywall screws
- Unique drum supporting system (axial airflow only)
 - at the rear: bearing
 - at the front: rubber rollers with bearings
- Large lint filter - easy removal of lint, efficient drying
- Axial airflow (SA025, SA030, SA035, SA055)
 - drum perforations only at the front and back
 - maximum airflow, less energy consumption and short drying times
- Radial airflow (SA075)
 - drum perforations over the entire surface
 - high production
 - pulley drive system
- Average of 40% lower energy input compared to the Speed Queen classic tumblers
- Overall utility savings per year are around 5%

- Quantum™ Gold Control
 - easy to operate, easy to program
 - flexibility of 5 programmable cycles
- Single slot electronic multi denomination coin drop for versatility and accuracy
- Digital display and countdown

Options

- Electric and Steam heat
- Stainless steel front
- Stainless steel drum
- Reversing: prevents tangling of the linen
- ECO Energy saver models
- Credit Card Activation



Supporting Smart Card, Tap & Go, Mag Stripe




EASY OPERATION



LOW ENERGY CONSUMPTION




LARGE DOOR OPENING



HIGH OUTPUT



NETWORK CAPABLE

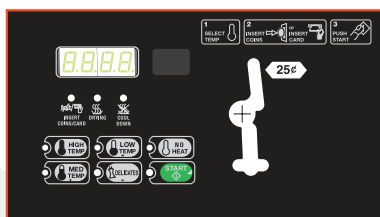

Quantum™ Gold Control

Controls

Quantum™ Gold

In addition to its network capabilities and remote off-site management features, Quantum™ Gold offers additional owner and customer benefits such as PC programming and machine audit capabilities, as well as time-of-day pricing, a "lucky cycle" for loyal customers and the ability to interface with the store owner's payment systems. Cycle modifier keys create additional profit opportunities for store owners.





	SA025	SA030	SA035	SA055	SA075
Drum					
Capacity 20:1 kg	12kg	14kg	16kg	25kg	34kg
Volume Lt	217	271	347	491	634
Cylinder diameter mm	673	673	762	838	939
Motor					
Fan kW (non-rev/rev)	0.19/0.19	0.19/0.19	0.19/0.19	0.37/0.37	0.56/0.25
Drive kW (non-rev/rev)	0.19/0.19	0.19/0.19	0.19/0.19	0.37/0.19	0.56/0.25
Programmer					
Type of control	Quantum Gold	Quantum Gold	Quantum Gold	Quantum Gold	Quantum Gold
Cabinet					
Colour	White, option stainless steel	White, option stainless steel	White, option stainless steel	White, option stainless steel	White, option stainless steel
Drum	Galvanized, option stainless steel	Galvanized, option stainless steel	Galvanized, option stainless steel	Galvanized, option stainless steel	Galvanized, option stainless steel
Heating					
Gas	67.5 MJ	77 MJ	95 MJ	107.6 MJ	174.1 MJ
Electric	9 kW	12 kW	12kW	18 kW	21 kW
Connection					
Electrical (Gas Heat)	240V/50Hz/1	240V/50Hz/1	240V/50Hz/1	240V/50Hz/1	240V/50Hz/1
Full Load Amps	7.5	7.5	7.5	5.5	7.0
Electrical V /Hz					
Make up air supply	710 cm ²	710 cm ²	929 cm ²	929 cm ²	1258 cm ²
Air outlet diameter mm	150	150	200	200	200
Steam inlet (NPT)	n/a	n/a	n/a	n/a	n/a
Steam Outlet (NPT)	n/a	n/a	n/a	n/a	n/a
Gas inlet (NPT)	12mm	12mm	12mm	12mm	12mm
Operation					
Drying cycles	5	5	5	5	5
Radial drying system yes or no	Axial	Axial	Axial	Axial	Yes
Decibel Rating	60dBA	61dBA	63dBA	63dBA	65dBA
Power					
With reversing (where available)	Option	Option	Option	Option	Option
Motor HP Fan kW (non-rev/rev)	0.19/0.19	0.19/0.19	0.19/0.19	0.37/0.37	0.56/0.25
Motor HP Drive kW (non-rev/rev)	0.19/0.19	0.19/0.19	0.19/0.19	0.37/0.19	0.56/0.25
Transport data					
Gross weight kg	151	165	179	216	307
Net weight kg	135	150	164	197	279
Dimensions H×W×D mm	1622×711×1038	1622×711×1191	1622×800×1191	1694×876×1365	1946×981×1378
Packaging dimension H×W×D mm	1753×762×1092	1753×762×1245	1753×838×1245	1829×902×1499	2057×1054×1433
Volume m ³	1.5	1.7	1.8	2.5	3.1
Agency Approvals					
Australian Gas Approval	#7401	#7401	#7401	#7401	#4944
CE Approval	Yes	Yes	Yes	Yes	Yes



Dimensions

	A	B	C	D	E
SA025	667	699	1038	1622	711
SA030	667	699	1191	1622	711
SA035	711	699	1191	1622	800
SA055	810	682	1365	1694	876
SA075	860	781	1378	1946 (G/E) 2032 (S)	981
			depth	height	width

All measurements are in mm.

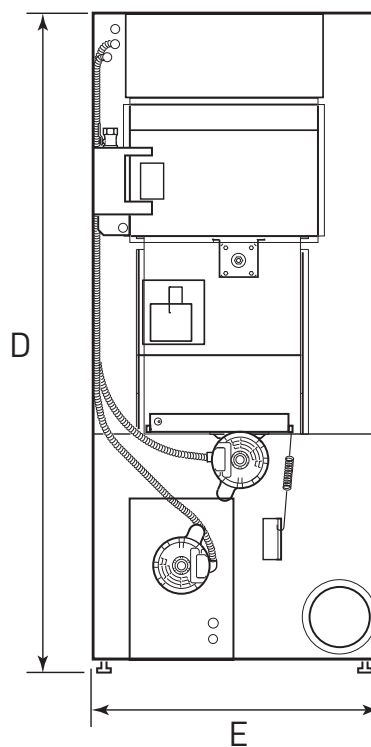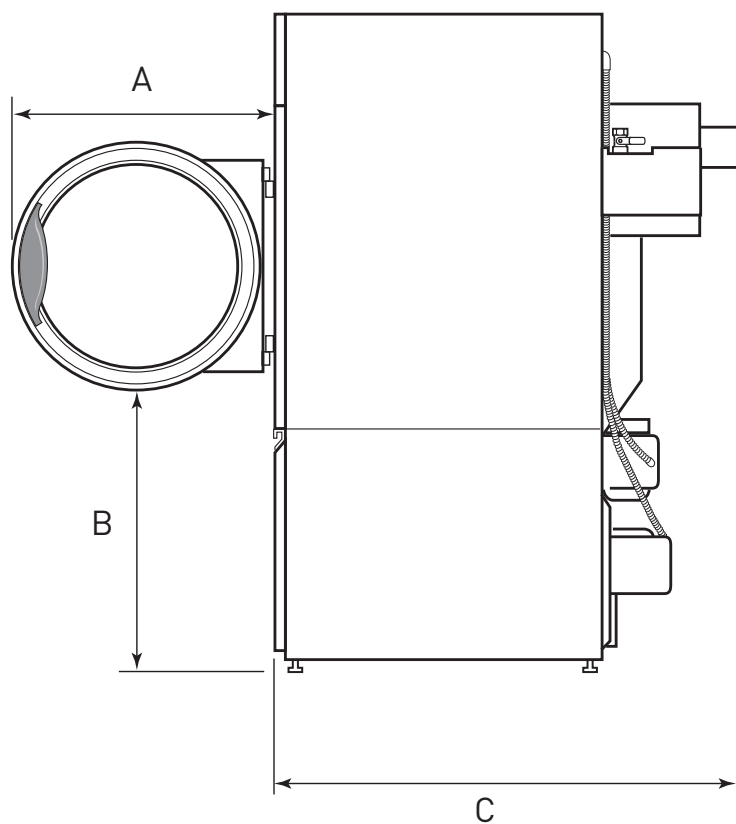



Speed Queen Equipment Sales Pty. Ltd.
26 Theobald Street, Thornbury, Vic 3071
Ph: (03) 9495 1300
Fax: (03) 9495 1600
W: www.speedqueensales.com.au
E: sales@speedqueensales.com.au
Servicing Victoria, Tasmania, S.A. & N.T.